

# Whitnell Way, Ashburton Estate London



Noise Impact Assessment Report  
Report 25737.NIA.01

Potter Raper  
101 St Martin's Lane  
London, WC2N 4AZ

Report 25737.NIA.01					
Revision History					
First Issue Date: 01/02/2023					
A		D			
B		E			
C		F			
Written by:		Checked by:		Approved by:	
<b>Marie Gauthier AMIOA</b> Acoustic Consultant		<b>Oliver Packman MIOA</b> Senior Acoustic Consultant		<b>Kyriakos Papanagiotou MIOA</b> Managing Director	
<b>Disclaimer</b> KP Acoustics Ltd. has used reasonable skill and care to complete this technical document, within the terms of its brief and contract with the resources devoted to it by agreement with the client. We disclaim any responsibility to the client and others in respect of any matters outside the stated scope. This report is confidential to the client and we accept no responsibility to third parties to whom this report, or any part thereof, is made known. KP Acoustics Ltd. accepts no responsibility for data provided by other bodies and no legal liability arising from the use by other persons of data or opinions contained in this report. KP Acoustics Ltd. 2023					

## Contents

SUMMARY.....	1
1.0 INTRODUCTION .....	2
2.0 SITE SURVEYS .....	2
2.1 Site Description .....	2
2.2 Environmental Noise Survey Procedure .....	2
2.3 Measurement Position.....	2
2.4 Equipment.....	4
3.0 RESULTS .....	5
4.0 NOISE ASSESSMENT GUIDANCE .....	6
4.1 Noise Policy Statement for England 2021.....	6
4.2 Planning Practice Guidance – Noise (PPG-N).....	7
4.3 BS8233:2014 .....	8
4.4 WHO Guidelines for Community Noise (1999) .....	8
4.5 Approved Document O (ed. 2021).....	8
4.5.1 Application .....	9
4.5.2 Internal Noise Level Targets.....	9
4.5.3 Methods to Remove Excess Heat .....	10
5.0 EXTERNAL BUILDING FABRIC SPECIFICATION .....	10
5.1 Non-Glazed Elements.....	10
5.2 Glazed Elements.....	11
6.0 VENTILATION AND OVERHEATING .....	12
6.1 Ventilation Strategy .....	12
6.2 Openable Windows.....	13
6.3 Overheating Control Strategies .....	14
7.0 CONCLUSION.....	14

### List of Attachments

25737.TH1	Environmental Noise Time History
Appendix A	Glossary of Acoustics Terminology

## SUMMARY

KP Acoustics Ltd has been commissioned to assess the suitability of the site at Whitnell Way, London SW15 6BZ for a residential development in accordance with the provisions of the National Planning Policy Framework and the Noise Policy Statement for England (NPSE).

An environmental noise survey has been undertaken on site in order to establish the current ambient noise levels, as shown in Table 3.1.

Sound reduction performance calculations have been undertaken in order to specify the minimum performance required from glazed elements in order to meet the requirements of BS8233:2014, taking into consideration the non-glazed external building fabric elements. The results of these calculations and the sound reduction performance requirements for the glazed elements are shown in Table 5.2.

Further advice can be provided with regards to the overheating strategy to assess the noise implications once thermal modelling calculations have been undertaken.

No further mitigation measures should be required in order to protect the proposed habitable spaces from external noise intrusion.

**1.0 INTRODUCTION**

KP Acoustics Ltd has been commissioned by Potter Raper, 101 St Martin's Lane, London, WC2N 4AZ, to assess the suitability of the site at Whitnell Way, London SW15 6BZ for three proposed residential infill blocks in accordance with the provisions of the National Planning Policy Framework and the Noise Policy Statement for England (NPSE).

This report presents the results of the environmental survey undertaken in order to measure prevailing background noise levels and outlines any necessary mitigation measures.

**2.0 SITE SURVEYS**

**2.1 Site Description**

There are three proposed infill sites bounded by Whitnell Way to the north, and residential dwellings to all other sides. At the time of the survey, the background noise climate was dominated by road noise from Whitnell Way and intermittent overhead air traffic.

**2.2 Environmental Noise Survey Procedure**



A noise survey was undertaken on the proposed site as shown in Figure 2.1. The location was chosen in order to collect data representative of the worst-case levels expected on the site due to all nearby sources.

Continuous automated monitoring was undertaken for the duration of the survey between 12.03 on 17/01/2023 and 10.48 on 18/01/2023.

Weather conditions were generally dry with light winds and therefore suitable for the measurement of environmental noise. The measurement procedure complied with ISO 1996-2:2017 Acoustics ‘Description, measurement and assessment of environmental noise - Part 2: Determination of environmental noise levels’.

**2.3 Measurement Position**

The measurement position was as described within Table 2.1 and shown within Figure 2.1.

Icon	Descriptor	Location Description
	Unattended Noise Measurement Position 1	The microphone was installed on the window of the lift overrun the top floor of the apartment block facing the North East, as shown in Figure 2.2.  The microphone was located within 1.5 metres of the nearest surface and therefore includes local reflections.
	Attended Noise Measurement Position 1	The microphone was positioned within free-field conditions at approximately 1.5 metres from the nearest surface on the ground floor, as shown in Figure 2.2.


Icon	Descriptor	Location Description
	Attended Noise Measurement Position 2	The microphone was positioned within free-field conditions at approximately 1.5 metres from the nearest surface on the ground floor, as shown in Figure 2.2.

Table 2.1 Measurement position and description



Figure 2.1 Site measurement position (Image Source: Google Maps)



Figure 2.2 Site locations

## 2.4 Equipment

The equipment calibration was verified before and after use and no abnormalities were observed. The equipment used is described within Table 2.2.

Measurement instrumentation		Serial no.	Date	Cert no.
Noise Kit 24	NTI Audio XL2 Class 1 Sound Level Meter	A2A-21175-E0	21/07/2022	UK-22-066
	Free-field microphone NTI Acoustics MC230A	A23577		
	Preamp NTI Acoustics MA220	10999		
	NTI Audio External Weatherproof Shroud	-		
Noise Kit 25	NTI Audio XL2 Class 1 Sound Level Meter	A2A-21141-E0	21/07/2022	UK-22-069
	Free-field microphone NTI Acoustics MC230A	A23583		
	Preamp NTI Acoustics MA220	10992		
	NTI Audio External Weatherproof Shroud	-		
B&K Type 4231 Class 1 Calibrator		2147411	24/05/2022	UCRT22/1581

Table 2.2 Measurement instrumentation

### 3.0 RESULTS

The  $L_{Aeq: 5min}$ ,  $L_{Amax: 5min}$ ,  $L_{A10: 5min}$  and  $L_{A90: 5min}$  acoustic parameters were measured throughout the duration of the survey. Measured levels are shown as a time history in Figure 25737.TH1.

Measured noise levels are representative of noise exposure levels expected to be experienced by all facades of the proposed development, and are shown in Table 3.1.

Time Period	Noise Measurement Position (Measured Noise level – dBA)
Daytime $L_{Aeq,16hour}$	62
Night-time $L_{Aeq,8hour}$	55

**Table 3.1 Site average noise levels for daytime and night time**

Further manual measurements have been undertaken to derive the expected noise levels for the individual facades of the proposed development. The results of these measurements are as follows:

Manned Measurement Location	Measurement Period	Manned Noise Level Measurement (dBA)	
		$L_{Aeq,T}$	$L_{A90}$
A	17/01/2023 12.09-12.29	52	42
B	17/01/2023 12.38-12.58	51	45

**Table 3.2 Manned noise measurements**

Time Period	Unattended Measurement Position 1 (Measured Noise level – dBA)	Attended Measurement Position 1 (Derived Noise level – dBA)	Attended Measurement Position 2 (Derived Noise level – dBA)
Daytime $L_{Aeq,16hour}$	62	53	52
Night-time $L_{Aeq,8hour}$	55	46	45

**Table 3.3 Average measured and derived noise levels for daytime and night time periods**



## 4.0 NOISE ASSESSMENT GUIDANCE

### 4.1 Noise Policy Statement for England 2021

The National Planning Policy Framework (NPPF) has superseded and replaces Planning Policy Guidance Note 24 (PPG24), which previously covered issues relating to noise and planning in England. Paragraph 174 of NPPF 2021 states that planning policies and decisions should aim to:

- preventing new and existing development from contributing to, being put at unacceptable risk from, or being adversely affected by, unacceptable levels of soil, air, water or noise pollution or land instability. Development should, wherever possible, help to improve local environmental conditions such as air and water quality, taking into account relevant information such as river basin management plans

In addition, Paragraph 185 of the NPPF states that *'Planning policies and decisions should also ensure that new development is appropriate for its location taking into account the likely effects (including cumulative effects) of pollution on health, living conditions and the natural environment, as well as the potential sensitivity of the site or the wider area to impacts that could arise from the development. In doing so they should':*

- Mitigate and reduce to a minimum potential adverse impacts resulting from noise from new development – and avoid noise giving rise to significant adverse impacts on health and the quality of life
- Identify and protect tranquil areas which have remained relatively undisturbed by noise and are prized for their recreational and amenity value for this reason

The Noise Policy Statement for England (NPSE) was developed by DEFRA and published in March 2010 with the aim to 'Promote good health and good quality of life through the effective management of noise within the context of Government policy on sustainable development.'

Noise Policy Statement England (NPSE) noise policy aims are as follows:

*Through the effective management and control of environmental, neighbour and neighbourhood noise within the context of Government policy on sustainable development.*

- *Avoid significant adverse impacts on health and quality of life;*
- *Mitigate and minimise adverse impacts on health and quality of life; and*
- *Where possible, contribute to the improvement of health and quality of life*

The Noise Policy Statement England (NPSE) outlines observed effect levels relating to the above, as follows:

- NOEL – No Observed Effect Level
  - This is the level below which no effect can be detected. In simple terms, below this level, there is no detectable effect on health and quality of life due to the noise.
- LOAEL – Lowest Observed Adverse Effect Level
  - This is the level above which adverse effects on health and quality of life can be detected.
- SOAEL – Significant Observed Adverse Effect Level
  - This is the level above which significant adverse effects on health and quality of life occur.

As stated in The Noise Policy Statement England (NPSE), it is not currently possible to have a single objective based measure that defines SOAEL that is applicable to all sources of noise in all situations. Specific noise levels are not stated within the guidance for this reason, and allow flexibility in the policy until further guidance is available.

#### **4.2 Planning Practice Guidance – Noise (PPG-N)**

Planning Practice Guidance – Noise (PPG) was introduced by the Ministry of Housing, Communities & Local Government in March 2014 and revised in July 2019. It is an online digital resource that “advises on how planning can manage potential noise impacts in new development”. It gives guidance on establishing whether noise will likely cause a concern, factors of influence on noise impact and methods by which planning can address adverse effects of noise sources.

A noise exposure hierarchy table is provided within the guidance that follows the same observed effect descriptors given within the NPSE guidance, i.e. NOEL, NOAEL and LOAEL and SOAEL.

For a NOAEL descriptor: “A noise has no adverse effect so long as the exposure does not cause any change in behaviour, attitude or other physiological responses of those affected by it. The noise may slightly affect the acoustic character of an area but not to the extent there is a change in quality of life”

**4.3 BS8233:2014**

BS8233:2014 ‘Sound insulation and noise reduction for buildings’ describes recommended internal noise levels for residential spaces. These levels are shown in Table 4.1.

Activity	Location	07:00 to 23:00	23:00 to 07:00
Resting	Living Rooms	35 dB(A)	-
Dining	Dining Room/area	40 dB(A)	-
Sleeping (daytime resting)	Bedrooms	35 dB(A)	30 dB(A)

**Table 4.1 BS8233 recommended internal background noise levels**

It should be noted that the recommended internal noise levels outlined above are not applicable under “purge ventilation” conditions as defined by Approved Document F of the Building Regulations, as this should only occur occasionally (e.g. to remove odour from painting or burnt food). However, the levels above should be achieved whilst providing sufficient background ventilation, either via passive or mechanical methods.

The external building fabric would need to be carefully designed to achieve these recommended internal levels.

**4.4 WHO Guidelines for Community Noise (1999)**

WHO Guidelines for Community Noise (1999) recommends that internal noise levels for individual events should not exceed 45dB  $L_{Amax}$  more than 10-15 times per night.

It should be noted that this impact is increasingly being regarded as ‘LOAEL’ for this number of exceedances, as described in Section 4.1.

The external building fabric would need to be carefully designed to ensure that the above guidance is achieved.

**4.5 Approved Document O (ed. 2021)**

Approved Document O (ADO) supports Part O of Schedule 1 to the Building Regulations 2010. ADO introduces requirements for residential premises in order to prevent overheating from occurring. There are two specific requirements from ADO:

Requirement O1 (1):

To limit unwanted solar gains in summer and to provide adequate means to remove heat from the indoor environment.

Requirement O1 (2):

- (a) Account must be taken of the safety of the occupant, and their reasonable enjoyment of the residence.
- (b) Mechanical cooling may only be used where sufficient heat cannot be removed from the indoor environment without it.

The statutory guidance to support Requirement O1(2)(a) contains requirements relating to noise at night.

#### 4.5.1 Application

The guidance within ADO applies to new residential buildings only and are defined within the following table:

Title	Purpose for which the building is intended to be used.
Residential (dwellings)	Dwellings, which includes both dwellinghouses and flats.
Residential (institutions)	Home, school or other similar establishment, where people sleep on the premises. The building may be living accommodation for the care or maintenance of any of the following. <ul style="list-style-type: none"> <li>A. Older and disabled people, due to illness or other physical or mental condition.</li> <li>B. People under the age of 5 years.</li> </ul>
Residential (other)	Residential college, hall of residence and other student accommodation, and living accommodation for children ages 5 years or older.

**Table 4.2 Residential buildings within the scope of ADO (ref. Table 0.1 of Approved Document O)**

Paragraphs 3.2 and 3.3 of ADO specifically refer to noise within bedrooms at night. Whilst any habitable room could be used as a bedroom, it is proposed that the scope is confined to those rooms specifically designated as bedrooms.

#### 4.5.2 Internal Noise Level Targets

ADO sets internal noise level targets within Paragraph 3.3 of the document:

*“Windows are likely to be closed during sleeping hours if noise within bedrooms exceeds the following limits.*

- a. *40dB  $L_{Aeq,T}$ , averaged over 8 hours (between 11pm and 7am)*
- b. *55dB  $L_{AFmax}$  more than 10 times a night (between 11pm and 7am).”*

Where an openable window for the removal of excess heat is predicted to result in the above internal noise levels to be exceeded, then the overheating mitigation strategy must adopt one of the alternative means listed within Paragraph 2.10 of ADO (presented within Section 4.7.3

of this report). This constraint applies regardless of which method is used to demonstrate compliance with Requirement O1 (1).

#### **4.5.3 Methods to Remove Excess Heat**

Paragraph 2.10 of ADO lists the means for removing excess heat from dwellings according to the following:

- Openable windows
- Ventilation louvres in external walls
- A mechanical ventilation system
- A mechanical cooling system

### **5.0 EXTERNAL BUILDING FABRIC SPECIFICATION**

Sound reduction performance calculations have been undertaken in order to specify the minimum performance required from glazed and non-glazed elements in order to achieve the recommended internal noise levels shown in Table 4.1, taking into account average and maximum noise levels monitored during the environmental noise survey.

At this stage, no detailed general arrangement drawings have been produced, and therefore typical bedroom dimensions have been assumed with a large area of glazing as follows:

- 3.0m x 4.0m x 2.4m with 4m<sup>2</sup> Glazing

As a more robust assessment,  $L_{Amax}$  spectrum values of night-time peaks have also been considered and incorporated into the glazing calculation in order to cater for the interior limit of 45 dB  $L_{Amax}$  for individual events, as recommended in WHO Guidelines.

Please note that the glazed and non-glazed element calculations would need to be finalised once all design proposals are finalised.

#### **5.1 Non-Glazed Elements**

At this project stage, the exact construction of the non-glazed external building fabric is unknown, however, it is understood that it would be based upon the construction proposed in Table 5.1 and would be expected to provide the minimum figures shown above when tested in accordance with BS EN ISO, 140-3:1995.

Element	Octave band centre frequency SRI, dB					
	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz
Metsec and Rainscreen Cladding System	27	38	45	49	50	50

**Table 5.1 Assumed sound reduction performance for non-glazed elements**

**5.2 Glazed Elements**

Minimum octave band sound reduction index (SRI) values required for all glazed elements to be installed are shown in Table 5.2. The performance is specified for the whole window unit, including the frame and other design features such as the inclusion of trickle vents. Sole glass performance data would not demonstrate compliance with this specification.

Glazing performance calculations have been based both on average measured night-time noise levels as well as verified against the  $L_{Amax}$  spectrum of individual events in order to comply with a maximum internal noise level of 45dB(A) in bedrooms as recommended by World Health Organisation Guidelines. The combined most robust results of these calculations are shown in Table 5.2.

Elevation	Octave band centre frequency SRI, dB						$R_w(C;C_{tr})$ , dB
	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	
Site 2 - All Elevations	30	32	38	36	40	49	39 (-1;-3)
Site 1 & 3 - All Elevations	23	23	30	39	36	43	34(-1;-4)

**Table 5.2 Required glazing performance**

The nominated glazing supplier should verify that their proposed window system meets the attenuation figures shown at each centre frequency band as shown in Table 5.2.

Example glazing types that would be expected achieve the above spectral values are shown in Table 5.3.

Elevation	Example glazing type
Site 2 - All Elevations	10/12/10
Site 1 & 3 - All Elevations	6/12/8

**Table 5.3 Example glazing types**

All major building elements should be tested in accordance with BS EN ISO 140-3:1995.

Independent testing at a UKAS accredited laboratory will be required in order to confirm the performance of the chosen system for an ‘actual’ configuration.

## 6.0 VENTILATION AND OVERHEATING

### 6.1 Ventilation Strategy

Based on the noise levels measured on site, appropriate ventilation systems are outlined in Table 6.1 below in order to ensure the internal noise environment is not compromised.

Ventilation System	Whole Dwelling Ventilation	Extract Ventilation
ADF System 1	Trickle vents providing a minimum performance of: Site 2 - 43dB $D_{n,e,w}$ Site 1 & 3 - 34dB $D_{n,e,w}$	Intermittent extract fans
ADF System 3	Continuous mechanical extract (low rate) and trickle vents for supply providing a minimum performance of: Site 2 - 43dB $D_{n,e,w}$ Site 1 & 3 - 34dB $D_{n,e,w}$	Continuous mechanical extract (high rate) with trickle vents providing inlet air
ADF System 4	Continuous mechanical supply and extract (low rate)	Continuous mechanical supply and extract (high rate)

**Table 6.1 Ventilation systems**

Where trickle vents are proposed, a typical number has been assumed based on the room size and number of windows. As trickle vents introduce a weak point in the building façade, it should be noted that increasing the number of trickle vents will reduce the composite performance of the facade. If more trickle vents are required, the required insulation should be increased by ‘+10\*LOG(N)’ where N is the number of vents proposed. If trickle vents are proposed, the total number of trickle vents for each sensitive space should be confirmed so that calculations can be accurately revised.

In the case of mechanical ventilation, systems should be designed to meet the internal noise levels as defined in CIBSE Guide A (2015), as shown in Table 6.2.

Room Type	$L_{Aeq}$ , dB	NR
Bedrooms	30	25
Living Rooms	35	30
Kitchen	45-50	40-45

**Table 6.2 CIBSE Guide A 2015 guidance levels for mechanical building services**

In all cases, purge ventilation would be provided by openable windows. As outlined in Section 4.3, the internal noise level requirement would not be applicable during purge conditions as this would only occur occasionally.

**6.2 Openable Windows**

Approved Document O (ADO) only applies to Bedrooms during night. The advice within this section would therefore only apply to Bedrooms during night-time hours (23:00-07:00) to ensure that the internal noise level targets of 40dB(A)  $L_{eq,T}$  and 55dB(A)  $L_{max}$  are not exceeded.

Table 6.3 presents the open area of the window as a % of the floor area which would need to be achieved to ensure that sufficient attenuation is provided from outside to inside.

Elevation	Sound Reduction Required to Achieve ADO Target Internal $L_{Aeq}$ Noise Levels	Sound Reduction Required to Achieve ADO Target Internal $L_{Amax}$ Noise Levels	Maximum Open Area of the Window as a Percentage of the Floor Area to Achieve ADO Target Internal Noise Levels
All	15 dB	23 dB	0 %

**Table 6.3 Window open areas**

The overheating model should inform the design team whether the % open areas above would be sufficient to remove excess heat. In the event they are insufficient, other options to limit solar gains into the building should be investigated (such as those outlined in Section 2.7 of Approved Document O), or other means of removing excess heat should be explored (as outlined in Section 2.10 of the Approved Document).

*Note: Acoustic open area is the measurable, cross-sectional, geometric area of an opening. For a partially open window, this is considered to be the lesser of either the size of the hole in the window frame that is left by the opening light, or the combined cross-sectional area around the opening light through which air must pass to move from outside to inside. The area around a hinged opening light includes the triangular areas on the sides adjacent to the hinge, and the rectangular area on the side opposite the hinge. This should not be used for comparing the air-flow performance of elements because this will also be dependent on factors such as depth (length of air-path), surface roughness and tortuosity.*



### 6.3 Overheating Control Strategies

Where the open areas specified above are not sufficient for controlling overheating, then one or more of the following strategies will need to be adhered to:

- Fixed shading devices comprising any of the following:
  - Shutters
  - External blinds
  - Overhangs
  - Awnings
- Glazing design, involving any of the following solutions
  - Size
  - Orientation
  - G-value
- Building design, e.g. the placement of balconies
- Shading provided by adjacent buildings structures or landscaping.
- Ventilation louvres in external walls
- A mechanical ventilation system
- A mechanical cooling system

KP Acoustics would be happy to review any proposals to ensure that they adhere to the internal noise levels targeted within ADO.

### 7.0 CONCLUSION

An environmental noise survey has been undertaken at Whitnell Way, London SW15 6BZ allowing the assessment of daytime and night-time levels likely to be experienced by the proposed development.

Measured noise levels allowed a robust glazing specification to be proposed which would provide internal noise levels for all residential environments of the development commensurate to the design range of BS8233:2014.

The maximum openable area for bedroom windows with the development has been presented based upon the requirements of Approved Document O.

An assessment of the external amenity areas with the development has been undertaken. The noise levels within the external amenity areas are in line with the guidance presented within BS8233:2014.

Whitnell Way - Position 1  
Environmental Time History  
17/01/2023 to 18/01/2023

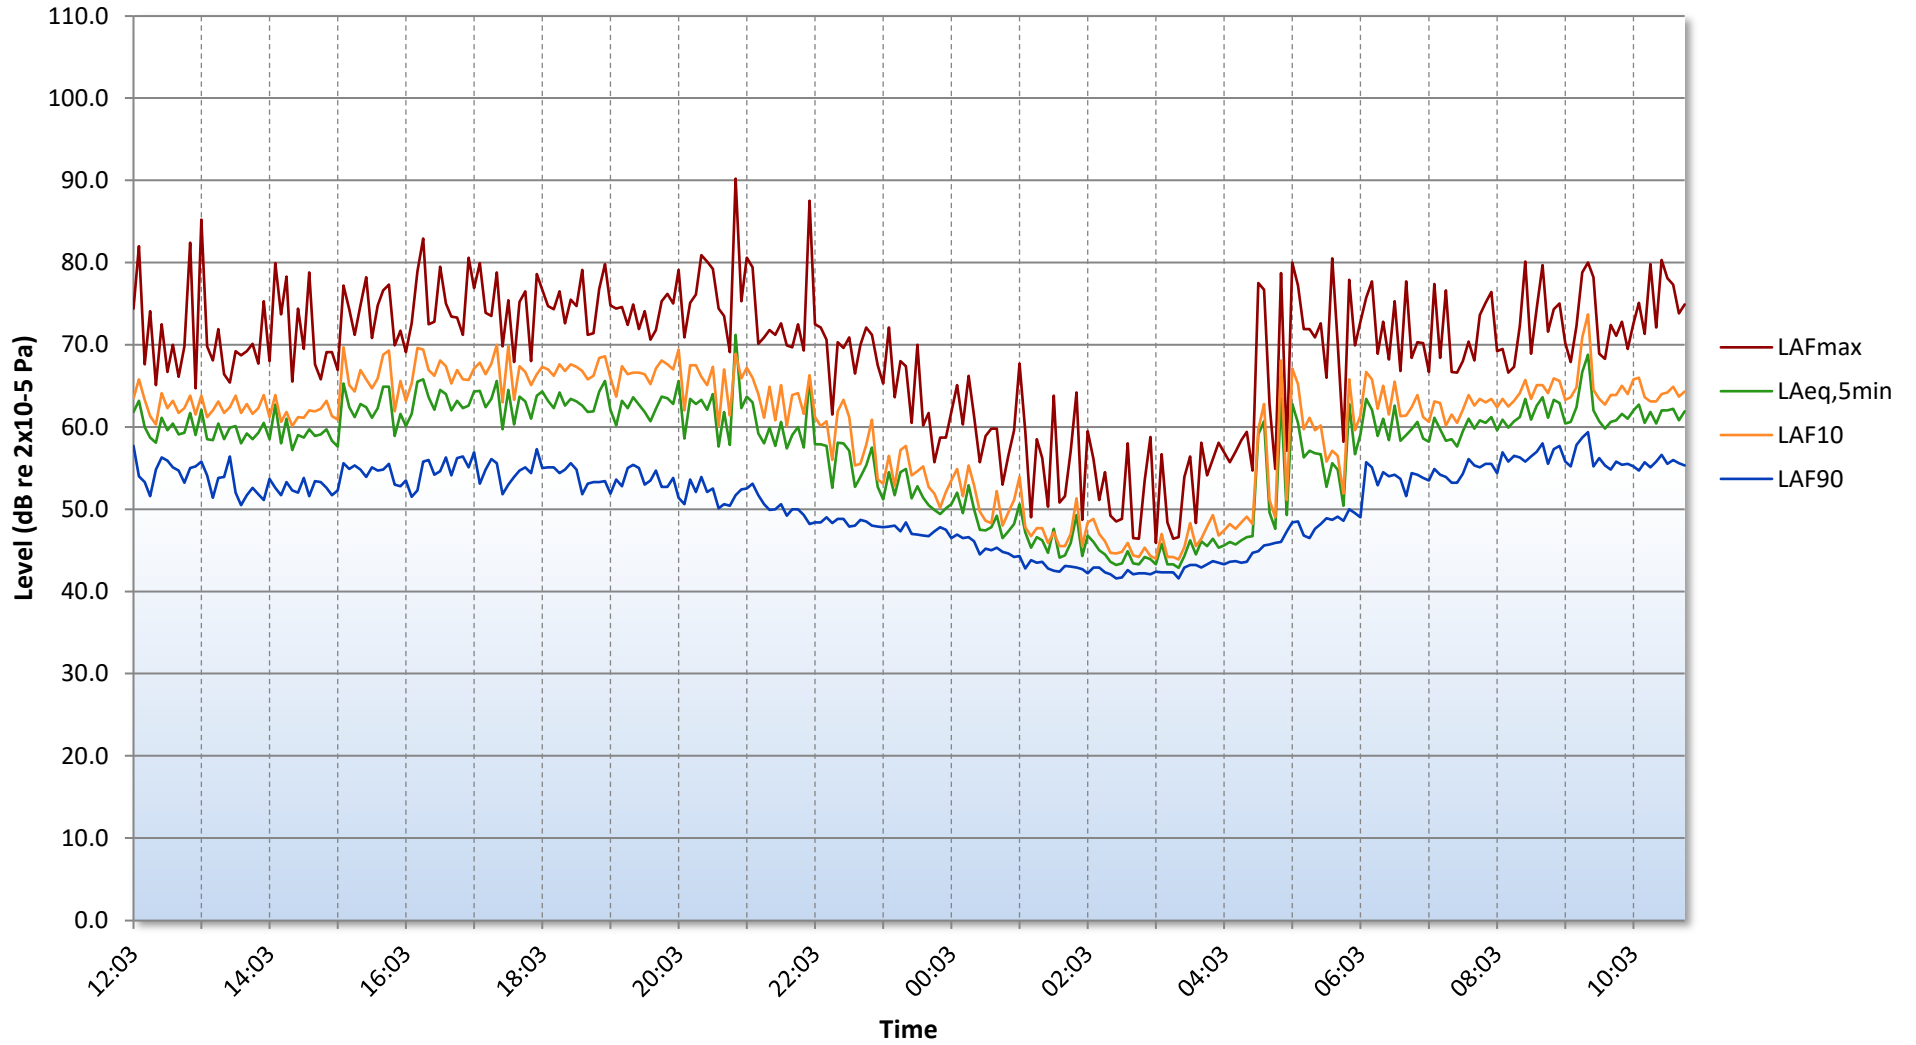


Figure 25737.TH1

## GENERAL ACOUSTIC TERMINOLOGY

### Decibel scale - dB

In practice, when sound intensity or sound pressure is measured, a logarithmic scale is used in which the unit is the 'decibel', dB. This is derived from the human auditory system, where the dynamic range of human hearing is so large, in the order of  $10^{13}$  units, that only a logarithmic scale is the sensible solution for displaying such a range.

### Decibel scale, 'A' weighted - dB(A)

The human ear is less sensitive at frequency extremes, below 125Hz and above 16Khz. A sound level meter models the ears variable sensitivity to sound at different frequencies. This is achieved by building a filter into the Sound Level Meter with a similar frequency response to that of the ear, an A-weighted filter where the unit is dB(A).

### $L_{eq}$

The sound from noise sources often fluctuates widely during a given period of time. An average value can be measured, the equivalent sound pressure level  $L_{eq}$ . The  $L_{eq}$  is the equivalent sound level which would deliver the same sound energy as the actual fluctuating sound measured in the same time period.

### $L_{10}$

This is the level exceeded for no more than 10% of the time. This parameter is often used as a "not to exceed" criterion for noise.

### $L_{90}$

This is the level exceeded for no more than 90% of the time. This parameter is often used as a descriptor of "background noise" for environmental impact studies.

### $L_{max}$

This is the maximum sound pressure level that has been measured over a period.

### Octave Bands

In order to completely determine the composition of a sound it is necessary to determine the sound level at each frequency individually. Usually, values are stated in octave bands. The audible frequency region is divided into 11 such octave bands whose centre frequencies are defined in accordance with international standards. These centre frequencies are: 16, 31.5, 63, 125, 250, 500, 1000, 2000, 4000, 8000 and 16000 Hertz.

Environmental noise terms are defined in BS7445, *Description and Measurement of Environmental Noise*.

## APPLIED ACOUSTIC TERMINOLOGY

### Addition of noise from several sources

Noise from different sound sources combines to produce a sound level higher than that from any individual source. Two equally intense sound sources operating together produce a sound level which is 3dB higher than a single source and 4 sources produce a 6dB higher sound level.

### Attenuation by distance

Sound which propagates from a point source in free air attenuates by 6dB for each doubling of distance from the noise source. Sound energy from line sources (e.g. stream of cars) drops off by 3dB for each doubling of distance.

### Subjective impression of noise

Hearing perception is highly individualised. Sensitivity to noise also depends on frequency content, time of occurrence, duration of sound and psychological factors such as emotion and expectations. The following table is a guide to explain increases or decreases in sound levels for many scenarios.

Change in sound level (dB)	Change in perceived loudness
1	Imperceptible
3	Just barely perceptible
6	Clearly noticeable
10	About twice as loud

### Transmission path(s)

The transmission path is the path the sound takes from the source to the receiver. Where multiple paths exist in parallel, the reduction in each path should be calculated and summed at the receiving point. Outdoor barriers can block transmission paths, for example traffic noise. The effectiveness of barriers is dependent on factors such as its distance from the noise source and the receiver, its height and construction.

### Ground-borne vibration

In addition to airborne noise levels caused by transportation, construction, and industrial sources there is also the generation of ground-borne vibration to consider. This can lead to structure-borne noise, perceptible vibration, or in rare cases, building damage.

### Sound insulation - Absorption within porous materials

Upon encountering a porous material, sound energy is absorbed. Porous materials which are intended to absorb sound are known as absorbents, and usually absorb 50 to 90% of the energy and are frequency dependent. Some are designed to absorb low frequencies, some for high frequencies and more exotic designs being able to absorb very wide ranges of frequencies. The energy is converted into both mechanical movement and heat within the material; both the stiffness and mass of panels affect the sound insulation performance.